
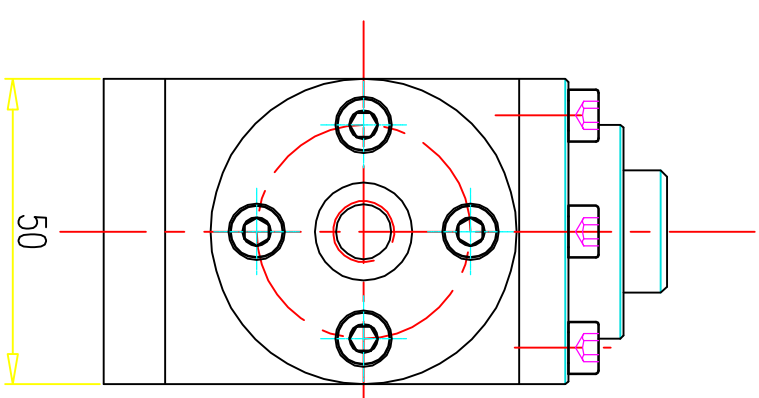


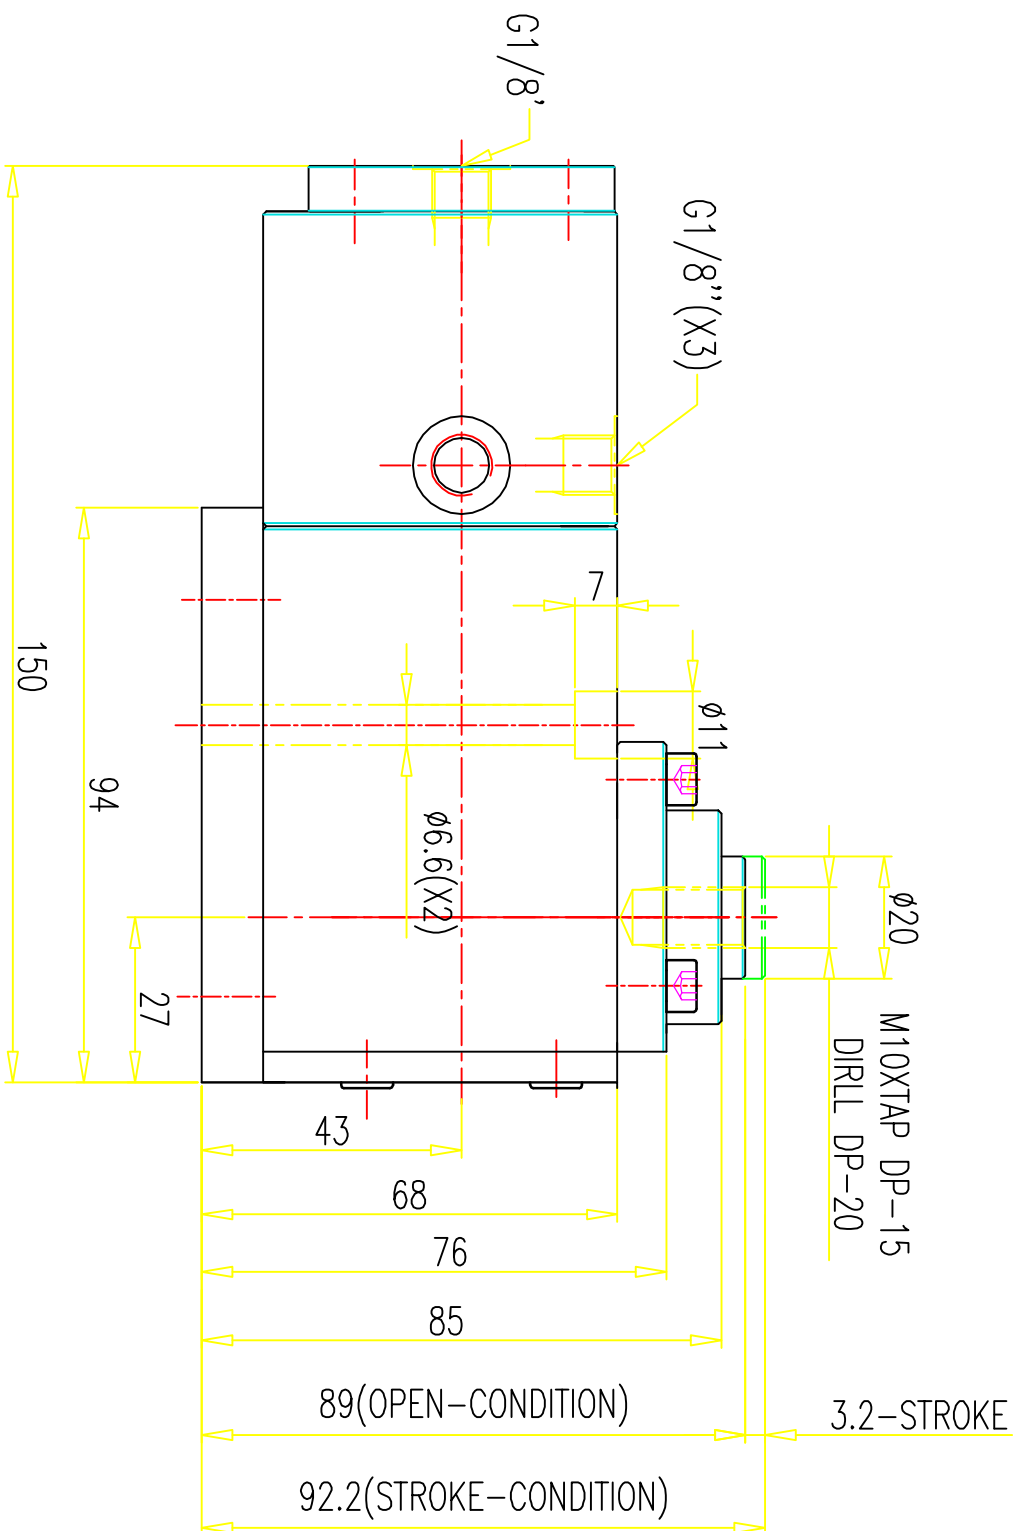

REVISION					
ZONE	REV	FROM	TO	DATE	APPROVED

Specification:—

Type : Double acting hydraulic support jack.
Positive locking
Tapped hole M10X20deep for mounting tip
Max . supporting lode 30kN.
Max . supporting stroke-3.2 mm
Operating pressure : max 100 bar/min 25 bar
Medium :Hydraulic oil
(servo system HLP46/HLP68)

	SURFACE FINISH															
	Ra value	μm	0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	25	50	100	
GENERAL TOLERANCES WHERE NOT SPECIFIED																
LINEAR – LENGTH OR DIAMETER												ANGULAR-LENGTH IN MM OF SHORT SIDE OF $\angle$				
0.5–6	6–30	30–120	120–315	315–1000	1000–2000	UPTO 6 6–30 30–120 120–400										
± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	$\pm 1^\circ$ $\pm 30'$ $\pm 20'$ $\pm 10'$										
 QUICLOC PVT LTD B'lore - 70																

HYDRAULIC

SUPPORT JACK-D/A

MATERIAL:	XXX
GROUP NO:	

SHEET NO: 1 OF: 1

	NAME	DATE
DESIGN	TIRUMAL	22.08.08
DRAWN	MDRUMAT	08.08.08

MACHINE TYPE

GROUP NO:	
SUPERCEDED BY	REPLACES

ORDERED		
APPROVED		

CUSTOMER:

DRAWING NO.:

721301

- 1.0 GENERAL
- 1.1 ALL DIMENSIONS ARE IN MM.
- 1.2 DO NOT SCALE THE DRG, IF IN DOUBT ASK.
- 1.3 SUBJECT TO CHANGE FOR IMPROVEMENT.