


225(DE CLAMP CONDITION)

M20X2.5P(X4)
VT; Vertical threaded mounting optional

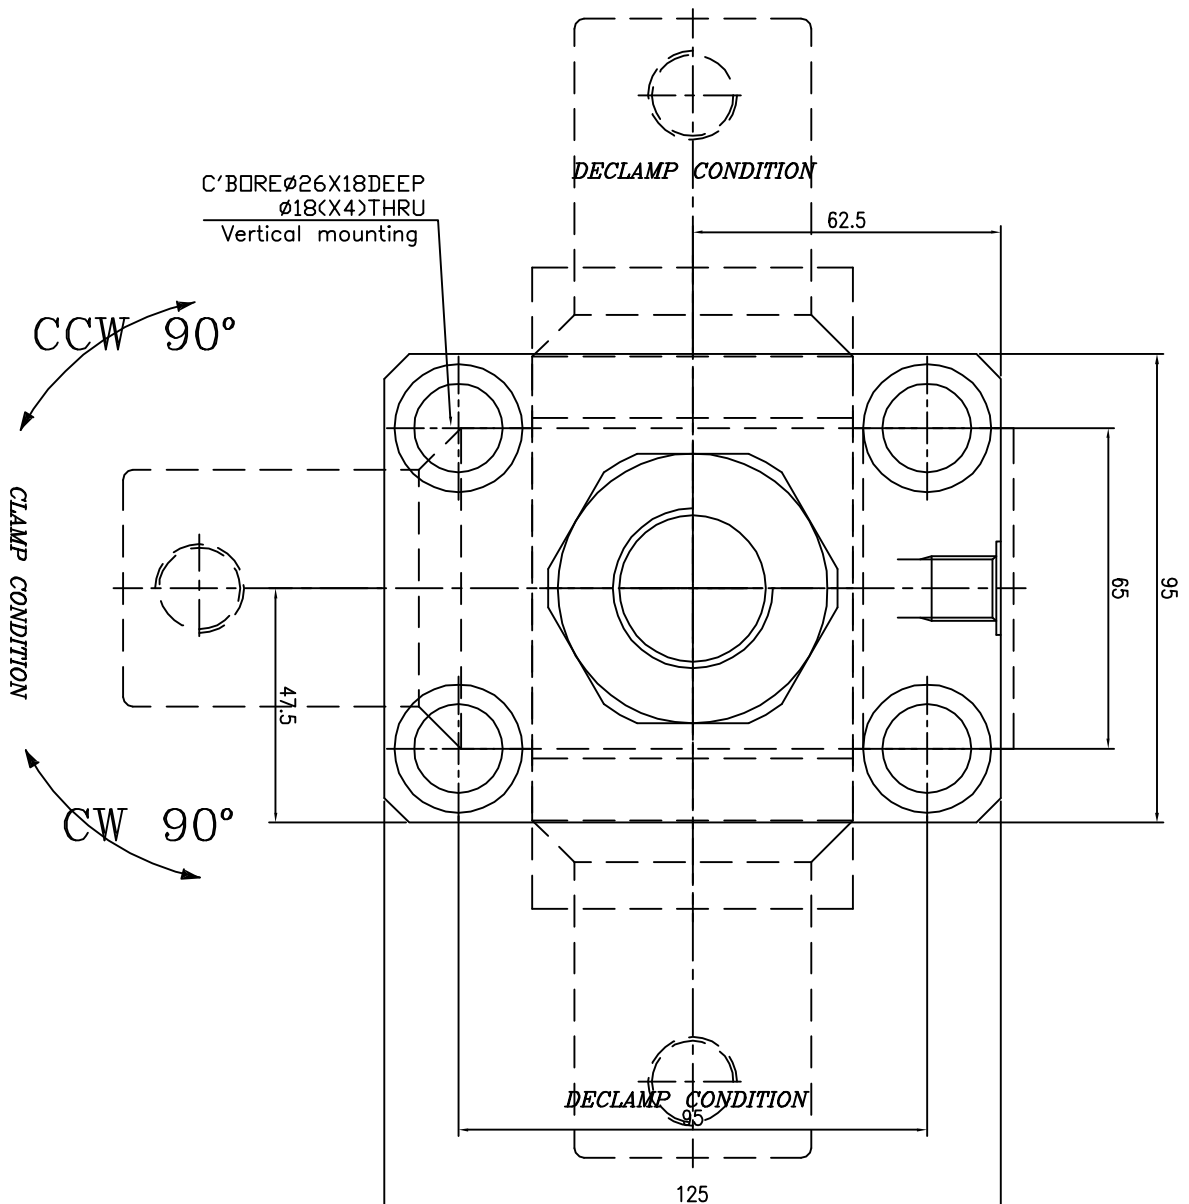

MODEL NO
C.W-S11305
C.C.W-S11306

Specification:-
Type : Doble acting hydraulic cylinder.
Bore dia = 63 mm, rod dia = 50 mm
Clamp Stroke =10; Swing Stroke = 20 mm
Total Stroke = 30
Operating pressure : max 150 bar/min 25 bar
Medium :Hydraulic oil
(servo system HLP46/HLP68)

- 1.0 GENERAL
- 1.1 ALL DIMENSIONS ARE IN MM.
- 1.2 DO NOT SCALE THE DRG.IF IN DOUBT ASK.

SURFACE FINISH		▽▽▽	▽▽▽	▽▽▽	▽▽▽	▽	~	
Ra value µm		0.025	0.05	0.1	0.2	0.4	0.8	1.6
LINEAR - LENGTH OR DIAMETER		0.5-6	6-30	30-120	120-315	315-1000	1000-2000	UP TO 6
ANGULAR-LENGTH IN MM OF SHORT SIDE OF ∠		±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±1°
SCALE:		1:1						
TITLE		BLOCK SWING CLAMP DOUBLE ACTING						
DESIGN	NAME	DATE	MACHINE TYPE					
THROWAL	THROWAL	28-10-06	THROWAL					
DRAWN	THROWAL	24-03-06	CUSTOMER:					
CHECKED			DRAWING NO: XXXX					
APPROVED			GROUP NO: XXXX					
			SUPERCEDED BY: -					
			REPLACES: -					
MATERIAL:		XXXX						
SHEET NO:		1 OF: 1						
QUICLOC		PVT LTD						
Blore - 70								

REVISION				
ZONE	REV	FROM	TO	DATE

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8